कार्य का नाम: (Recall-I) CDW to Conservation and Restoration of Fortification Wall, Structure and Pathways from Ambarkhana to Birth Place at Shivneri Fort, Tal. Junnar, Dist. Pune

भारत सरकार
भारतीय पुरातत्व सर्वेक्षण
मुम्बई मण्डल, मुम्बई

फा. सं. 4/16/Cons/CDW/Jun/2014-15 **दिनांक:-** १३.०२.२०१७

निविदा आमंत्रण सूचना

भारत के राष्ट्रपति की ओर से अधीक्षण पुरातत्वविद्, भारतीय पुरातत्व सर्वेक्षण, मुम्बई मण्डल, सायन किला, सायन (पूरब), मुम्बई - ४०० ०२२ ने (**Recall-I) CDW to Conservation and Restoration of Fortification Wall, Structure and Pathways from Ambarkhana to Birth Place at Shivneri Fort, Tal. Junnar, Dist. Pune** इस कार्य के लिए भारतीय पुरातत्व सर्वेक्षण / सी.पी. ड्ब्ल्यू. डी / एम.ई.एस. / पी.डब्लू.डी. / रेलवे के अनुमीदित और पात्र निर्माणकार / ठेकेदार और संबंधित क्षेत्र में पंजीकृत फार्म से दिनांक **२३.०२.२०१७** में **अपरान्ह ३.०० बजे** तक **प्रतिशतता दर** निविदा मुहरबंद लिफाफे में मांगी है, जो उसी दिन **अपरान्ह ३.३० बजे अधीक्षण पुरातत्वविद्, भारतीय पुरातत्व सर्वेक्षण, मुम्बई मण्डल, सायन किला, सायन (पूरब), मुम्बई - ४०० ०२२** के कार्यालय में खोला जायेगा। अभीष्ट फार्म निविदा अनुसूची के साथ पंजीकरण, आयकर और विक्रयकर समाशोधन प्रमान पत्र, अनुभव और अन्य संबंधित प्रमाण पत्र तथा निष्पादित किये गये पूर्व कार्य संबंधित दस्तावेज सहित निरपवाद रुप से इस कार्यालय में अवश्य जमा करे।

अनुमान लागत: रु.८०,३०,९३८/- **अग्रिम जमा राशि: रु.२,००,७७३/-**

अग्रिम राशि माँग पत्र (डिमांड ड्राफ्ट) द्वारा किसी भी राष्ट्रीय बैंक से **"अधीक्षण पुरातत्वविद्, भारतीय पुरातत्व सर्वेक्षण, मुम्बई मण्डल, मुम्बई"** के नाम पर अवश्य जमा करनी चाहिए। वे ठेकेदार / पूर्तिकर जो उपर उद्धत निविदा से संबंधित अग्रिम राशि जमा नही करते है तो उनका निविदा फार्म सरसरी तौर पर अस्विकृत कर दिया जायेगा।

निविदा फार्म और निबंधन इस कार्यालय से दिनांक **२२.०२.२०१७** तक या इससे पूर्व सभी कार्यालयीन दिवस पर प्रत्येक के लिए **११२२.०० रुपये** का भुकतान (अप्रतिदेय) कर प्राप्त किया जा सकता है। निविदा फार्म और निबंधन इस कार्यालय के वेबसाइट www.asi.nic.in से और www.eprocure.gov.in से भी दिनांक **२२.०२.२०१७** तक डाउनलोड किया जा सकता है। वेबसाइट से डाउनलोड किये गये प्रत्येक फार्म के साथ ११२२.०० रुपये का माँग पत्र (डिमांड ड्राफ्ट) किसी भी राष्ट्रीयकृत बैंक से **"अधीक्षण पुरातत्वविद्, भारतीय पुरातत्व सर्वेक्षण, मुम्बई मण्डल, मुम्बई"** के नाम पर (अप्रतिदेय) निविदा फार्म की राशि के रूप मे जमा करना अनिवार्य है।

मुहरबंद लिफाफे में कार्य का नाम एवं खुलने कि तिथि स्पष्ट लिखी होनी चाहिए। निविदा प्रपत्र किसी भी कार्य दिवस में **रु. ११२२.०० (१००० + १२२)** रुपये से देय पर दिनांक **२२.०२.२०१७ तक ६.०० सायंकाळ** तक "अधीक्षण पुरातत्वविद्, भारतीय पुरातत्व सर्वेक्षण, मुम्बई मण्डल, मुम्बई" के कार्यालय से कनिष्ठ संरक्षण सहायक, जुन्नर उप मण्डल तथा रोकड़ अनुभाग, मुम्बई मण्डल से भी प्राप्त किया जा सकता है।

-sd-
अधीक्षण पुरातत्वविद्

Government of India
Archaeological Survey of India
Mumbai Circle, Mumbai

F. No.4/16/Cons/CDW/Jun/2014-15 **Date: 13.02.2017**

NOTICE INVITING TENDER

The Superintending Archaeologist, Archaeological Survey of India, Mumbai Circle, Sion fort Sion, Mumbai, on behalf of President of India, invites tender in sealed cover for the supply of material from the approved and eligible contractors / Suppliers of ASI / CPWD / MES / PWD / Railways and Public undertaking dated **23.02.2017** up to **15:00** hrs. and will be opened in the office of the Superintending Archaeologist, Archaeological Survey of India, Mumbai Circle, Mumbai on the same day at 15:30hrs.

Name of Work: - (Recall-I) CDW to Conservation and Restoration of Fortification Wall, Structure and Pathways from Ambarkhana to Birth Place at Shivneri Fort, Tal. Junnar, Dist. Pune

Estimated Cost of Rs.80,30,938/- **EMD Rs.2,00,773/-**

The tender documents are available on website www.asi.nic.in & www.eprocure.gov.in which may be downloaded. The earnest money and tender cost **Rs. [1000+122 vat]** be obtained separately in the form of Demand draft of any Nationalized Bank in favour of the "**Superintending Archaeologist**, **Archaeological Survey of India, Mumbai Circle, Mumbai-22".** **(All Attested Documents should be submitted along with tender schedule.)**

The sealed cover should be superscripted with the name of work & date of opening. Tender document can also be obtained on all working days on payment of **Rs.1122.00 [1000+122 vat]** up to dated **22.02.2017** from the office of the Superintending Archaeologist , Archaeological Survey of India, Mumbai Circle, Mumbai – 22 and Jr. Conservation Assistant, Junnar Sub Circle and Cashier, Mumbai Circle, Mumbai .

-sd-
Superintending Archaeologist

Tender Form No.44

F. No.4/16/Cons/CDW/Jun/2014-15

Name of Work: - (Recall-I) CDW to Conservation and Restoration of Fortification Wall, Structure and Pathways from Ambarkhana to Birth Place at Shivneri Fort, Tal. Junnar, Dist. Pune

01.	Sale Price of Tender	: **Rs.1122/- (Non-refundable)**
02.	Name of the Contractor/Firm	:
03.	Date of Application for Tender form by Contractor/Firm	:
04.	Date of Receipt of Application in Circle/Branch Office:	
05.	Cash Receipt No. & Date	:
06.	Date of issue of Tender Paper	:
07.	Date of Receipt of Tender Paper	:
08.	Date of Opening the Tender	: dt.
09.	E.M.D. enclosed or not	: Yes/No Vide D.D. No. Date

<u>Eligibility Criteria:</u>

The agency / Firms / Contractor must have earlier experience of similar nature of conservation works attended at ancient temples, heritage sites etc. Tender participated should be as per **Central Vigilance Commission's** guidelines as detailed below:

I. Average annual financial turn over the last three years, ending 31st March of previous financial year should be at least 30% of the estimated cost.

II. Experience of having successfully completed similar works during last 7 years ending last days of month previous to the one in which the applications are invited should be either of the following:

a) Three similar completed works costing not less than the amount equal to 40% of the estimates cost. **OR**
b) Two similar completed works costing not less than the amount equal to 50% of the estimates cost. **OR**
c) One similar completed works costing not less than the amount equal to 40% of the estimates cost. **OR**

F. No.4/16/Cons/CDW/Jun/2014-15 **Date of Opening: 23.02.2017**
P.W.D.(9) Tender Form No. 44 [ ]

TENDER FOR EXECUTION OF WORK

Name of Work: (Recall-I) CDW to Conservation and Restoration of Fortification Wall, Structure and Pathways from Ambarkhana to Birth Place at Shivneri Fort, Tal. Junnar, Dist. Pune

Price of Tender Rs.1000/- **+VAT** Rs. 122/- **= Rs.1122/- (Non-refundable)**

Issued to

-sd-
Superintending Archaeologist
Archaeological Survey of India
Mumbai Circle, Mumbai

I/We hereby tender for the President of India for the Supply of Material /Execution of Work as described in the undersigned memorandum of the contract according to the specification within the time specified and at the area specified therein subject to the conditions of the Contract.

MEMORANDUM:

(i) Earnest Money Deposit: **2.5% i.e. Rs.2,00,773/-** ii) Percentage to be deducted from Bill: (a) 2.24% Income Tax (Non-refundable) + (b) 10% Security Deposit

Sl. No.	Description or specification of materials to be executed	Total quantities	Places at which to be work executed	Quantities to be execution at each place	Dates by which execution at all places must be completed	Rates at which articles are to be executed inclusive of every demand and VAT	Unit	Total cost of each article inclusive of every demand	Remarks
	1	2	3	4	5	6	7	8	9
01	Provision for dewatering the ancient rock cut water cistern located at various locations by using 3 HP diesel engine including diversion of stream, Providing coffer dam, earthen bunds etc. complete and as directed by work Incharge.	1318270.00 Ltr.	**At work site i.e. Ambarkhana to Birth Place at Shivneri Fort**	**As per the Direction of C.A. in charge**	**180 days from the date of issue of work order**	0.029	Ltr.	38230.00	
02	Provision for de-silting the ancient rock cut water cistern located at various locations carefully by illumination the cistern by using electrical halogen bulb, including removal of silt consists with slushy earth, boulders and other foreign material, cleaning, disposing the unwanted materials to the safe distance etc. complete and as directed by work Incharge.	698.63 Cum				600.00	Cum	419178.00	

Sl. No.	Description or specification of materials to be executed	Total quantities	Places at which to be work executed	Quantities to be execution at each place	Dates by which execution at all places must be completed	Rates at which articles are to be executed inclusive of every demand and VAT	Unit	Total cost of each article inclusive of every demand	Remarks
	1	2	3	4	5	6	7	8	9
03	Provision for reconstruction of side wall of rock cut water cistern for increasing the height as per original for safety with 40% available stone salvaged from debris and 60% new C.R. stone of size 0.30x0.25x0.25 mtr. cut in shape and front face of stone dressed as a table top and all corner of stone measured a 90° to the each other stone obtained from approved quarry by using un-slaked lime mortar 1:3, consolidating the admixture by adding surkhi, jaggery, hirda fruit, dinka (gum) and potable water including necessary dressing of stone during execution, carrying, lifting, placing in position with the help of scaffolding and lifting equipments, including all cost, curing etc. complete and as directed by work Incharge. **Note:- Cost of all basic infrastructure i.e. lime grinding machine, construction of brick tank for slaking lime and other T and P required for the execution of work should owned by the contractor only.**	79.90 Cum	**At work site i.e. Ambarkhana to Birth Place at Shivneri Fort**	**As per the Direction of C.A. in charge**	**180 days from the date of issue of work order**	19280.00	Cum	1540472.00	
04	Providing pointing to the side wall of rock cut water cistern by using traditional un-slaked lime mortar 1:2, consolidating the admixture by adding surkhi, jaggery, hirda fruit, dinka (gum) and potable water including racking out joints finishing suitable to give flush joints, including all cost, curing etc. complete and as directed by work Incharge. **Note:- Cost of all basic infrastructure i.e. lime grinding machine, construction of brick tank for slaking lime and other T and P required for the execution of work should owned by the contractor only.**	263.79 Sqm				334.00	Sqm	88106.00	

Sl. No.	Description or specification of materials to be executed	Total quantities	Places at which to be work executed	Quantities to be execution at each place	Dates by which execution at all places must be completed	Rates at which articles are to be executed inclusive of every demand and VAT	Unit	Total cost of each article inclusive of every demand	Remarks
	1	2	3	4	5	6	7	8	9
05	Water tightening the naked wall of rock cut water cistern in ancient manner by using traditional un-slaked lime mortar 1:2, consolidating the admixture by adding surkhi, jaggery, hirda fruit, dinka (gum), water proof compound and potable water including racking out joints finishing suitable to give flush joints, including all cost, curing etc. complete and as directed by work Incharge. **Note:- Cost of all basic infrastructure i.e. lime grinding machine, construction of brick tank for slaking lime and other T and P required for the execution of work should owned by the contractor only.**	119.66 Sqm	**At work site i.e. Ambarkhana to Birth Place at Shivneri Fort**	**As per the Direction of C.A. in charge**	**180 days from the date of issue of work order**	394.10	Sqm	47158.00	
06	Providing and fixing in position of G. I. Pipe railing in three rows with 40mm dia G. I. pipe heavy duty, fixed with I.S.M.B.100x50 mm I Section post of 1.65 mtr. length and dully welded with 10mm dia, 150 mm length of M.s. bars at the bottom for facilitating anchorage spaced between two post is 2.50 mtr. center to center, excavation for foundation of the post in hard soil/rock of size 0.45x0.45x0.45 mtr, bedding the post in 1:2:4 cement concrete in a same size including all fitting and one coat of anticorrosive paint and over it two coat of oil painting etc. complete and as directed by work Incharge. **Note:-The excavation for foundation of the post should be carried out manually only.**	239.00 Rmt				3400.00	Rmt	812600.00	
07	Provision for earth work excavation over the ground for gardening in hard soil and boulders including removal of excavated materials and disposing the same up to a distance of 50 mtr. etc. complete and as directed by work Incharge.	338.39 Cum				750.00	Cum	253793.00	

Sl. No.	Description or specification of materials to be executed	Total quantities	Places at which to be work executed	Quantities to be execution at each place	Dates by which execution at all places must be completed	Rates at which articles are to be executed inclusive of every demand and VAT	Unit	Total cost of each article inclusive of every demand	Remarks
	1	2	3	4	5	6	7	8	9
08	Providing earth filling to the areas by good quality earth consisting with brick bats and cow dunk in a proportion 0.60 Cum good quality earth 0.30 Cum brick bats and 0.20 Cum cow dunk up to a depth of 25 to 30cm, including conveyance of earth, cow dunk, brick bats from stacking place to work site, laying in layers, watering etc. complete and as directed by work Incharge.	338.39 Cum	**At work site i.e. Ambarkhana to Birth Place at Shivneri Fort**	**As per the Direction of C.A. in charge**	**180 days from the date of issue of work order**	6260.00	Cum	2118321.00	
09	Provision for grassing the areas with good quality Korean jumping grass pad including lying, watering etc. complete and as directed by work Incharge. **Note: - The specified rate of the said item of work included with one year maintenance of the garden and the 60% payment of the said item of work will be issued to the contractor after handover the healthy garden to the department only.**	1972.00 Sqm				1140.00	Sqm	2248080.00	
10	Provision for planting the healthy and good quality decorative plants of various verity like Minichar nerium, Galfemia, Tagar verigated, Golden ficus, Black ficus, Thuja and other decorative plants as selected by the head of office or its representative including excavation, filling of good quality earth mixing with cow dunk cost of plants, labours etc. complete and as directed by work Incharge. **Note: - The specified rate of the said item of work included with one year maintenance of the plant and the 60% payment of the said item of work will be issued to the contractor after handover the healthy plant to the department only.**	500.00 No				930.00	No	465000.00	
							Total Rs.	**80,30,938.00**	

Note: The work should be executed on top of the hill at Shivneri Fort.

Signature of the Contractor /Tenderer

SITE PLAN OF SHIVNERI FORT-JUNNAR, DIST PUNE

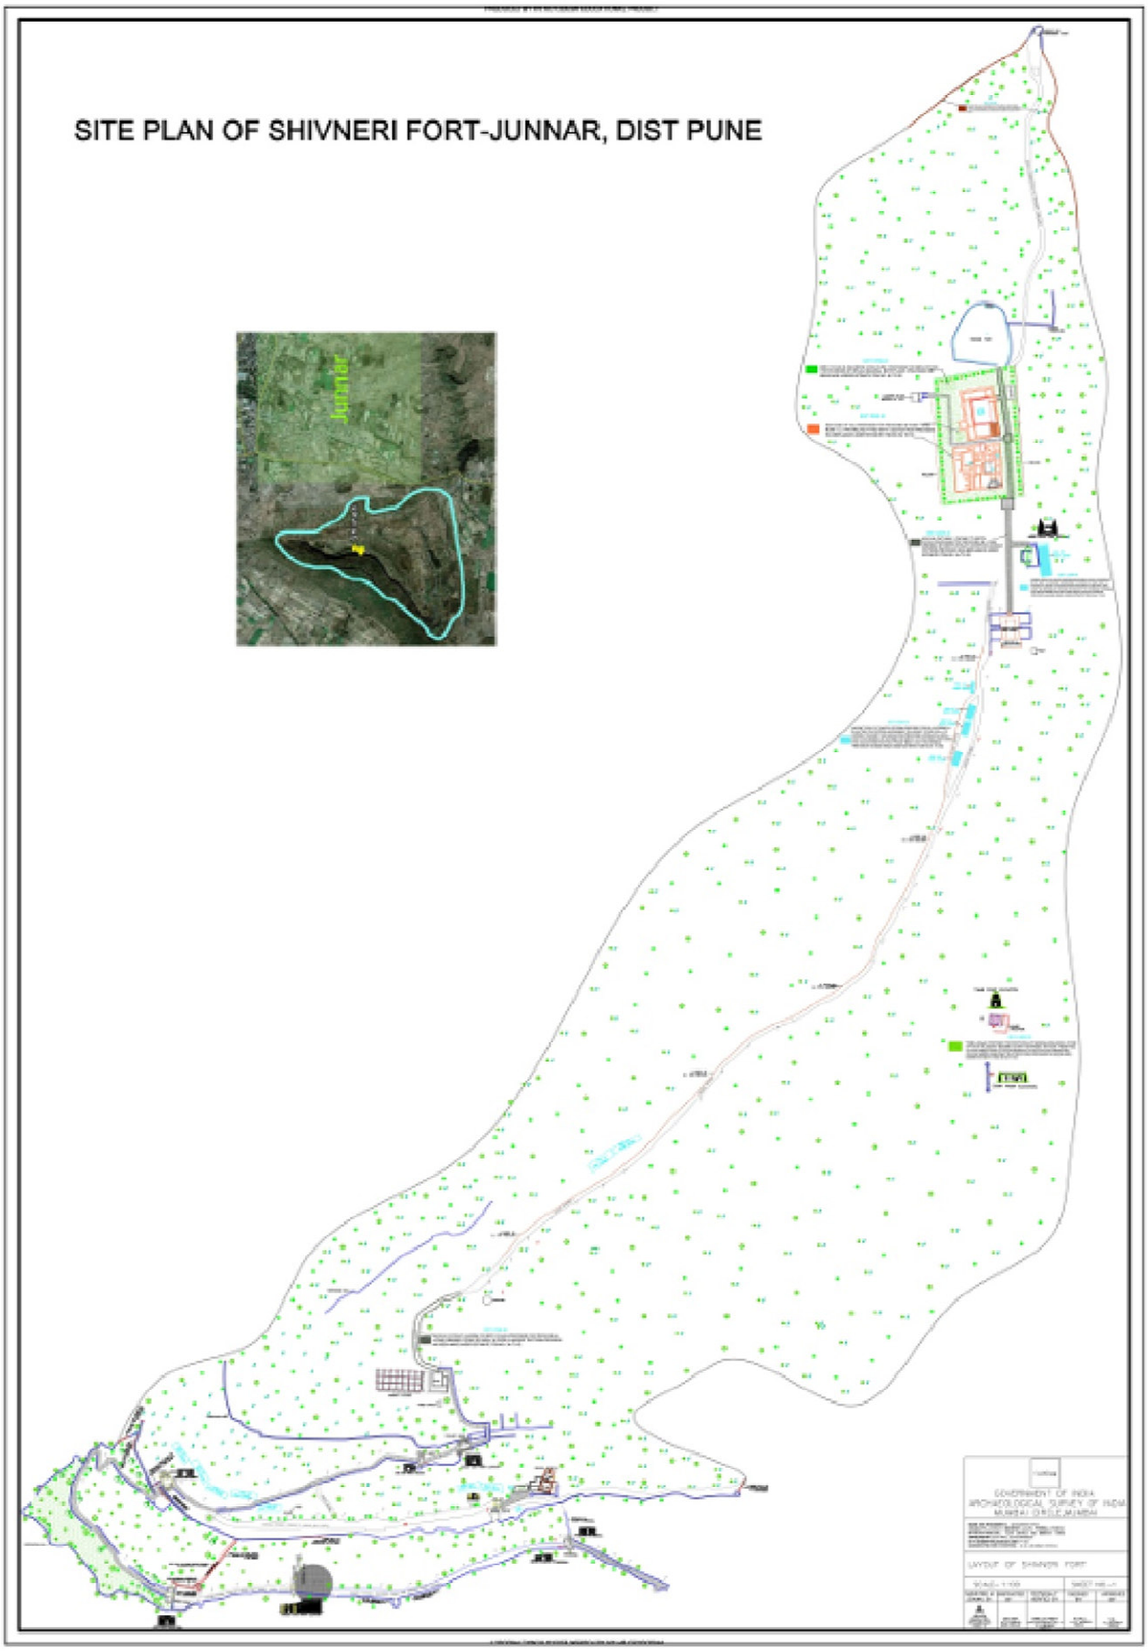

Should the Tender be accepted, I/We hereby agree to abide by and fulfill at the terms and provisions of the said conditions annexed here to so far as applicable and or in default thereof forfeit and pay the President of India or his successor's office the sums of money mentioned in the said conditions.

A Sum of **Rs._____/-** is herewith forwarded in form of Demand Draft/Treasury Challan as Earnest Money Deposit. If I/We fail to deposit the amount of Security Deposit specified against (ii) in the memorandum in accordance with clause 1 of the said conditions of Contract:

I/We agree that the President or his successors in office shall, without prejudice to any other right or remedy, be at liberty to forfeit the said Earnest Money Deposit shall be retained by him towards such Security Deposit.

I/We further agree that said President or his successors in office shall also be at liberty to cancel the acceptance of the Tender if /We fail to deposit the Security Amount as aforesaid.

Demand Draft No. _____ dated ___ /___ /2016 for **Rs._____** payable at Mumbai in favour of **"Superintending Archaeologist, Archaeological Survey of India, Mumbai Circle, Mumbai**" towards the **Earnest Money Deposit** is enclosed.

Place: **Signature of Tenderer along with complete address with pin no. and copy of pan card**

Date: **Address:**

Signature of Witness to Signature of Tenderer **Pin No.:**

Dated the **Signature:**

The above Tender is hereby accepted by me on behalf of the President of India.

Date: Signature of the Officer by whom the Tender is accepted.

C.P.W.D. Tender Form 7/8

F. No.4/16/Cons/CDW/Jun/2014-15 **Date of Opening: 23.02.2017**

TENDER FOR THE WORKS

I/We hereby tender for the work – (**Recall-I) CDW to Conservation and Restoration of Fortification Wall, Structure and Pathways from Ambarkhana to Birth Place at Shivneri Fort, Tal. Junnar, Dist. Pune** in the underwritten memorandum within the time specified in such memorandum at _____

_____

_____

Percent below ☐ **/ above** ☐ the estimated rates entered in Schedule –A (memorandum showing items of works to be carried out) and in accordance all respect with the specifications, quantities, designs, drawings and other instructions. As per the percentage rate quoted above the cost of the items of work to be carried out is amounting to Rupees

*_____ _____

_____ in total.

(* in figures as well as words)

Signature of Bidder

-sd-

Superintending Archaeologist

ASI, Mumbai Circle

TERMS AND CONDITIONS

1. Sealed tenders, which should always be placed in sealed covers with the name of the work superscribed on the envelopes and also the last date for receiving tenders which will be received by the ***Superintending Archaeologist, Archaeological Survey of India, Mumbai Circle, Sion Fort, Mumbai -22*** up to 15.00 hrs on **23.02.2017** and will be opened by him in the office on the same day at 15.30hrs.

2. The time allotted for the carrying out the works/supplying materials is **180 days** from the date of issuing of written orders to effect the supply/commence the work.

3. The contractor/Supplier should quote his rate in words and figures per unit, any correction in the rates should be attested by the dated signature of the contractor/suppliers. Otherwise such quotations are liable for rejection. The amount for each item should be worked out and requisite of total should be given.

4. The tenders will be opened at the prescribed time and date in the presence of tenderers who will be present at the time.

5. The supply of materials/execution of work must be completed in all respects to the entire satisfaction of the Superintending Archaeologist, Archaeological Survey of India, Mumbai Circle, Mumbai or any officer authorized by him within the stipulated time and no extension of time will be given without any sufficient reason. **For any delay in completion of work over the prescribed time limit, penalty (compensation) may be imposed @ 1% of the Gross amount of order for per week of delay as per clause 2 of General conditions of contract for CPWD works.**

6. The supply of materials/execution of works must be strictly as per the specifications given in the notice inviting tenders, such as materials/works which does not confirm the specification in part or in whole will be rejected.

7. The acceptance of tenders will rest with the Superintending Archaeologist, Archaeological Survey of India, Mumbai Circle, Mumbai who is not bound to accept the lowest quoted rates and reserves the authority to reject any or all tenders without assigning any reason.

8. Tenders which do not fulfill any the above conditions or incomplete in any respect are liable for summarily rejection.

9. Canvassing in connection with the tenders is strictly prohibited and tenders submitted by the tenderer who indulge in canvassing will be liable for rejection.

10. The works shall be carried out by the contractor/firm strictly in accordance with A.S.I. guidelines / specifications as amended from time to time.

11. The rates given for the works should be inclusive of all taxes, leads and lifts etc. Nothing extra shall be paid over the rates quoted by the contractor/firm

12. It shall be the responsibility of the contractor/firm to ensure that no damage is caused to monument / Govt. property at the site by his/their vehicle or labour party. Cost of such damages, if any, will be assessed at the discretion of the Superintending Archaeologist and the same will have to be made good by the contractor/firm.

P.T.O

Contd…….. from pre page

13. The tender submitted on behalf of a firm shall be signed by all the partners of the firm or by a partner who is duly authorised on behalf of the firm to enter into contract. Otherwise the tender is liable to be rejected.

14. The contractors/firm shall not sublet any portion of contract without the written permission of ASI. Failing which the undersigned shall serve a notice, rescinding the contract, where upon the Earnest Money and Security Money shall be forfeited.

15. Security Money will be deducted @ 5 to 10% from the running payments and it will be refunded after 6 months of completion of work.

16. Error/omission if any should be rectified with no claim.

17. No claim whatsoever on account of fluctuations in prices will be entertained.

18. The contractor/firm shall not be entitled to any compensation whatsoever on account of any delay or default in the finalization and acceptance of design report.

19. The Earnest Money and Security Deposit of the successful contractor/firm will be forfeited, if he fails to comply with any of the conditions of the contract and work shall be carried out at risk and cost of the contractor/firm.

20. If more than one tenderer quoting the same rates are received, it will be the discretion of undersigned calling one tenderer to award the work to whom he finds more suitable to do the job and his decision will be final and binding on the tenderer.

21. It is understood that the bidder has inspected the site and assessed the volume of work before bidding for the project; no claims whatsoever will be entertained at any stage, in this regard.

22. The running payment will be made as per CPWD rules and if demanded by tenderer according to said rules.

23. Time shall be considered as the essence of the Contract. The entire work must be completed within the prescribed time limit from the date of award letter. Failing which the remaining work can be re-allotted to another contractor/firm at the risk and cost of the contractor/firm with due notice to the contractor/firm.

I agree to supply/execute the work at the rate/rates quoted in my quotation be approved and further I her by agree to fulfill all the terms and conditions laid down in the notice inviting quotations as above.

Accepted

-sd-

Sign. of Contractor

Superintending Archaeologist
ASI, Mumbai Circle